


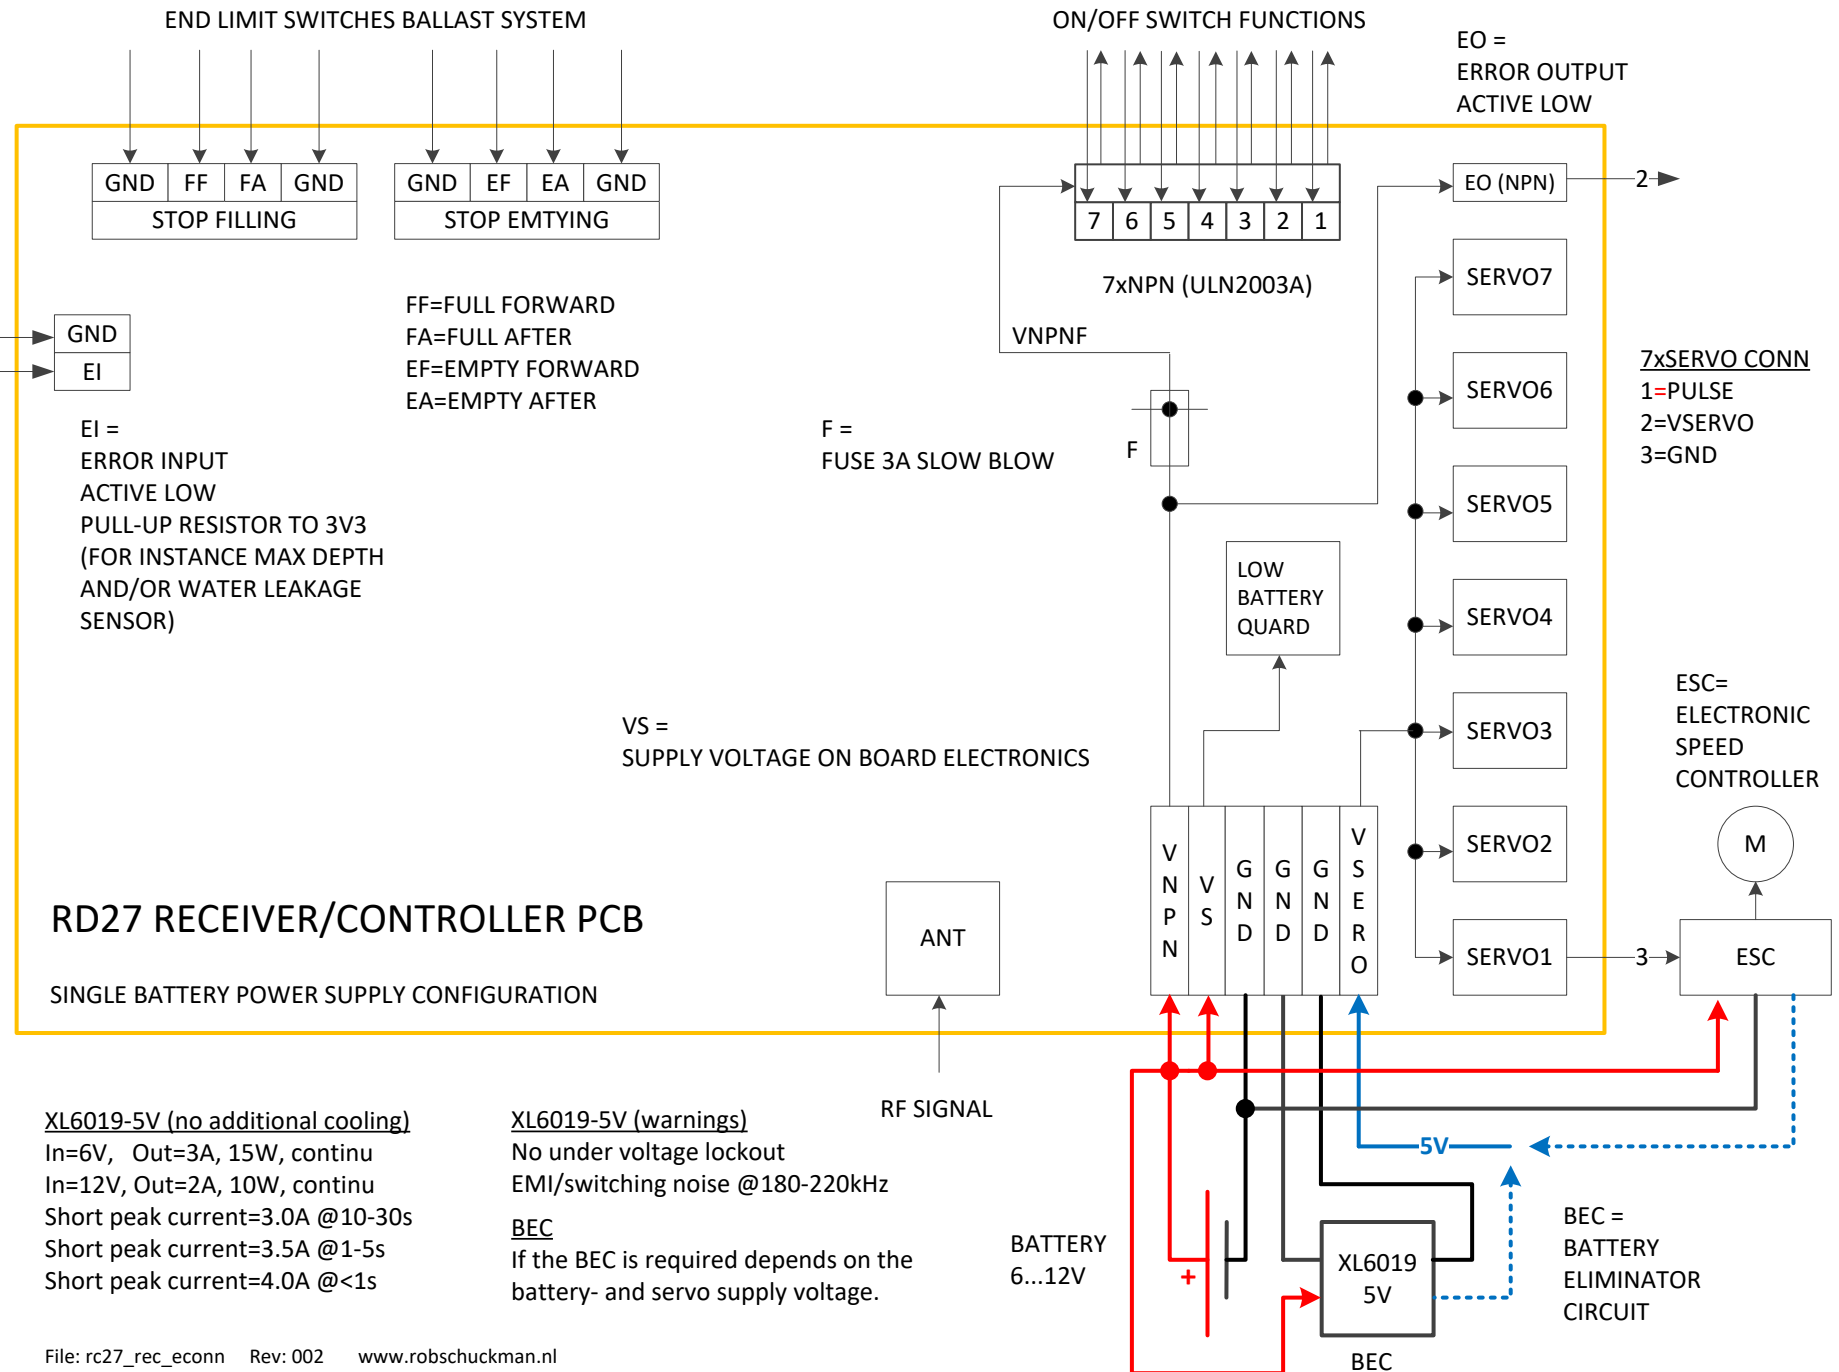

XL6019-5V (no additional cooling)

In=6V, Out=3A, 15W, continu
In=12V, Out=2A, 10W, continu
Short peak current=3.0A @10-30s
Short peak current=3.5A @1-5s
Short peak current=4.0A @<1s

XL6019-5V (warnings)

No under voltage lockout
EMI/switching noise @180-220kHz

BEC

If the BEC is required depends on the
battery- and servo supply voltage.